


Cap for fresh air intake and exhaust air. The cap is designed for facades with a fixed shield and a grille in the bottom. The cap has four holes on the side for mounting, either using screws or nails.

Available in four sizes: Ø160, Ø200, Ø250 and Ø315. When mounted, the duct should be horizontally centered in the cap to avoid disrupting airflow. We recommend sealing between the façade and the cap.

## Product data

Type	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	Weight [kg]	Free Area (A <sub>f</sub> ) [m <sup>2</sup> ]
Ø160 b	257	140	245	245	18	14	1.2	0.0235
Ø200 b	297	140	285	285	18	14	1.4	0.0276
Ø250 b	349	173	335	334	18	14	2.0	0.0413
Ø315 b	411	207	400	394	18	14	2.8	0.0595

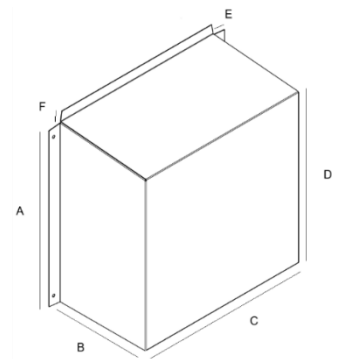

## Material and finish

- Galvanized steel (0.5 mm)
- Standard finish: powder-coated, RAL 7024, sheen 30

For other finishes than the standard finish, contact Airmaster.

## Maintenance

The external parts should be wiped with a damp cloth. The cap must be inspected regularly, and objects such as leaves must be removed. The ventilation duct behind the cap should be inspected and cleaned regularly.