


Datasheet AM 500

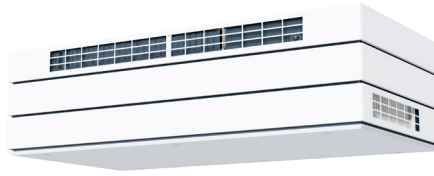


Technical data	Filter class	30 dB(A)	33 dB(A)	35 dB(A)
Maximum capacity ¹	ePM ₁₀ 50%	430 m ³ /h	490 m ³ /h	550 m ³ /h
	ePM ₁ 55%	387 m ³ /h	441 m ³ /h	495 m ³ /h
	ePM ₁ 80%	344 m ³ /h	392 m ³ /h	440 m ³ /h
Throw (0,2 m/s) ²	ePM ₁₀ 50%	5.9 m	-	7.5 m
	ePM ₁ 55%	5.4 m	-	6.7 m
	ePM ₁ 80%	4.8 m	-	6.0 m
Supply air filter	ePM ₁₀ 50%, ePM ₁ 55% or ePM ₁ 80%			
Extract air filter	ePM ₁₀ 50%			
Dimensions (BxHxD)	1600 x 439 x 779 mm			
Weight, standard air handling unit, complete	108 kg			
Color, Panel / Color, Case	RAL 9010 (white) / RAL 7024 (grey)			
Counterflow heat exchanger	Aluminum			
Air leakage classification cf. EN1886/EN13141-7	Class L2 / A2			
Air leakage classification main damper, cf. EN1751	Class 3			
IP code	10			
Duct connection	Ø250 mm			
Condensate pump (Capacity ; Lifting height at 5 l/h)	10 l/h ; 6 m			
Condensate drain hose int./ext. diameter	Ø6 mm / Ø9 mm			
Supply voltage	220-240V/50Hz, ~1N+PE			
Nominal power consumption ¹	354 W			
Maximum current ¹	2,76 A			
Power factor	0.56			
Maximum fuse	13 A (1 phase, type B). When using the cc module, it is type C			
Leakage current AC / DC	≤ 6mA			
Recommended residual current breaker (RCCB)	Type B			
Electrical heating surfaces		Preheating surface	Comfort heating surface	
Heat output		1000 W	630 W	
Nominal current		4.4 A	2.6 A	
Thermal circuit breaker, manual reset		100 °C	100 °C	
Water heating surface				
Nominal heat output ³		858 W		
Connection dimension		1/2" (DN 15)		
Materials pipes/fins		Copper/aluminum		
Opening/closing time motor valve		60 s		
Maximum operating temperature		90 °C		
Maximum operating pressure		5 bar		

¹ All measurements were performed in normal operating mode in a standard installation using the facade grills recommended by Airmaster: Airmaster Boomerain® Ø250.


² Throw was measured with filter class: supply air ePM₁₀ 50% | Extract air ePM₁₀ 50%

³ Heat output for maximum capacity at 35 dB(A), delivery/return temperature 60/40°C and a liquid flow of 53 l/h.


Capacity with ePM₁₀ 50% / ePM₁₀ 50% filters ⁴

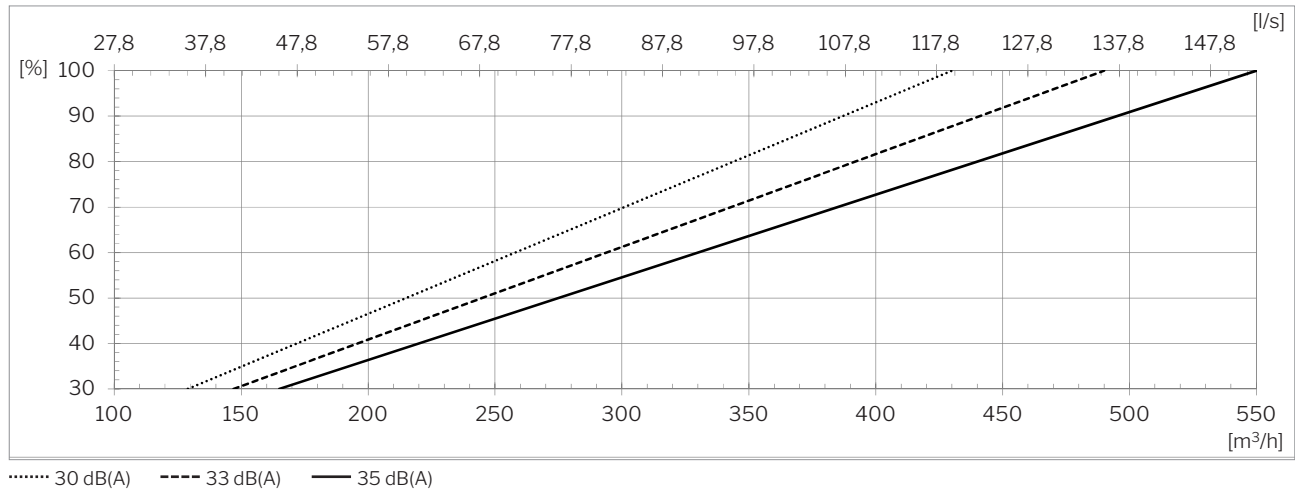

Capacity with ePM₁ 55% / ePM₁₀ 50% filters ⁴

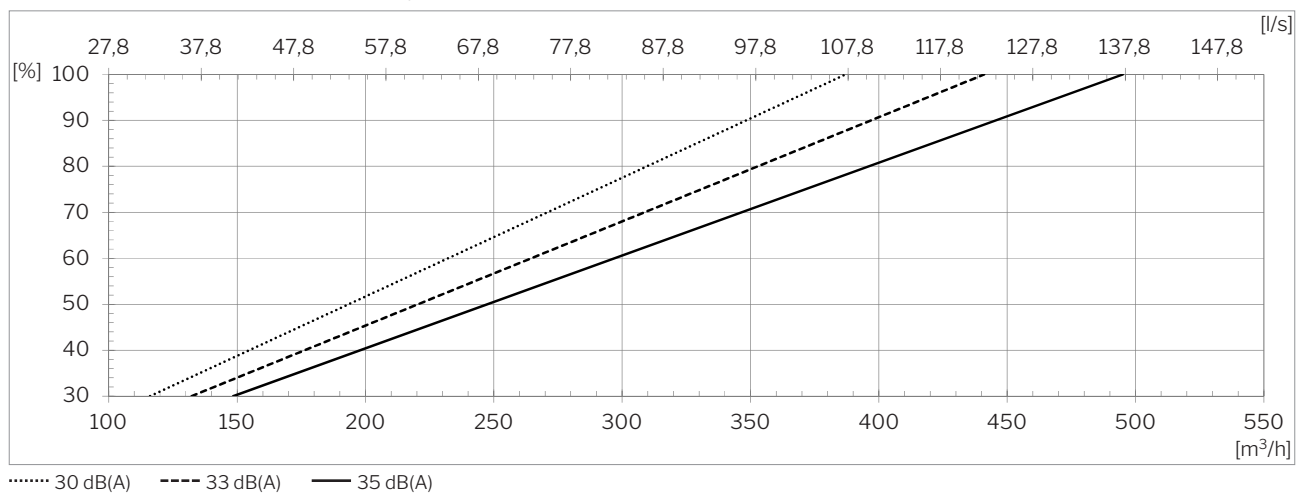


Capacity with ePM₁ 80% / ePM₁₀ 50% filters ⁴

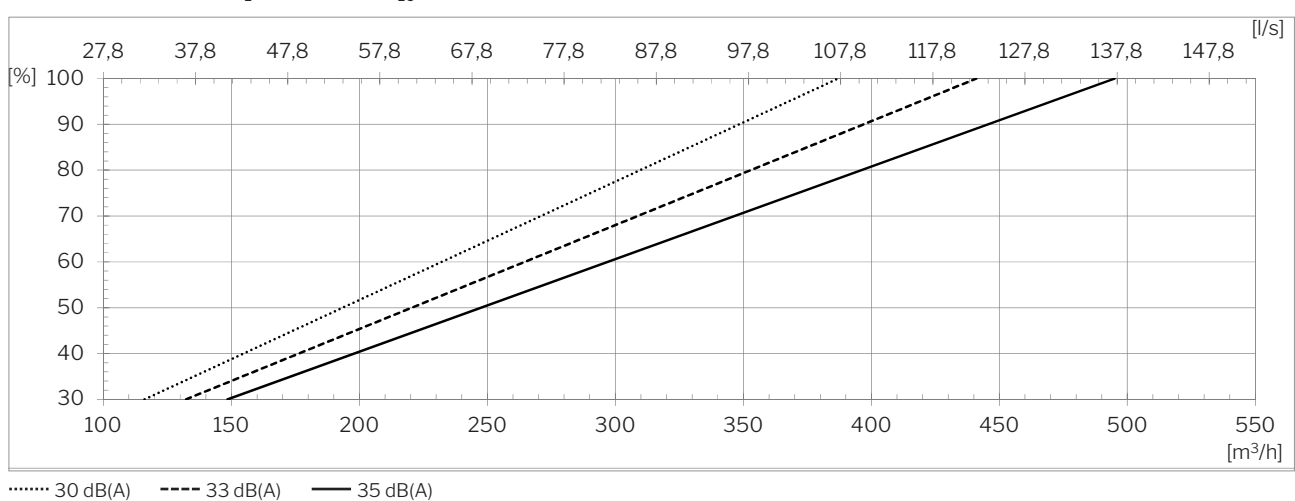


⁴ All measurements were performed in normal operating mode in a standard installation using the facade grills recommended by Airmaster: Airmaster Boomerain® Ø250.


Sound pressure ^{5,6} $L_{pA,eq}$ acc. Airmaster reference situation

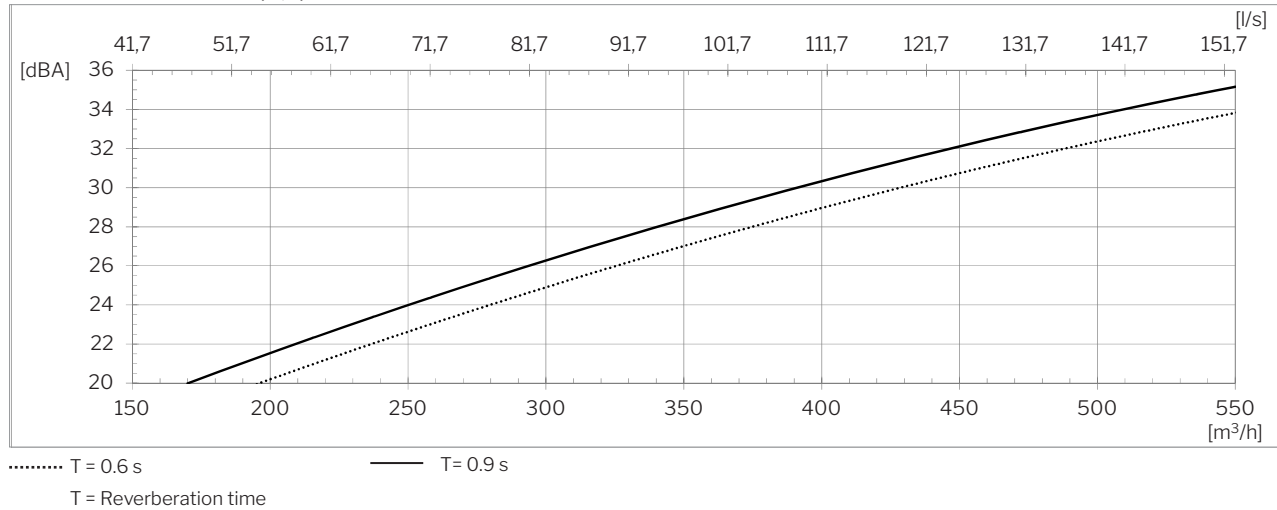

Temperature efficiency acc. EN 308

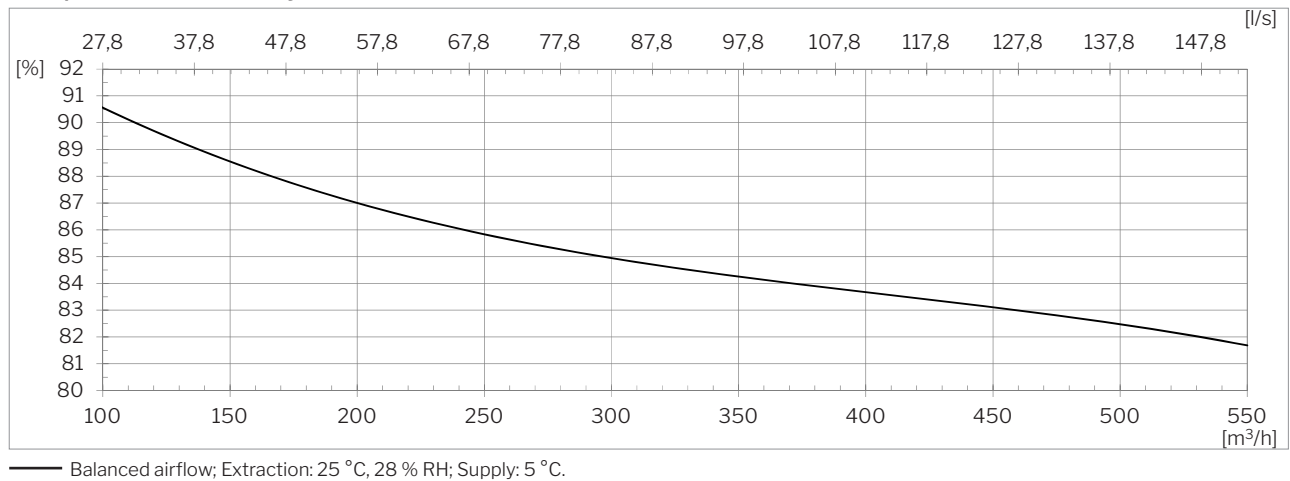


Power consumption ⁶

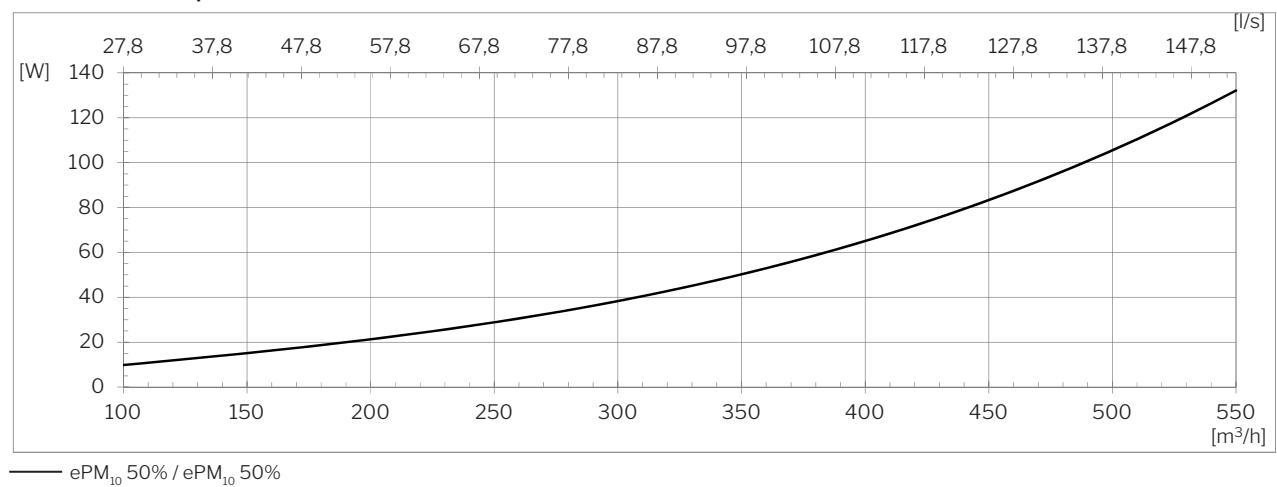


⁵ Sound pressure level $L_{pA,eq}$ is measured in a height of 1.2 m with at horizontal distance of 1 m from the air handling unit in room with a size of 200 m³ and a reverberation time of T = 0.6 s, corresponding to a room attenuation of 7.5 dB.

⁶ All measurements were performed in normal operating mode in a standard installation using the facade grills recommended by Airmaster: Airmaster Boomerain® Ø250.

SFP ⁷

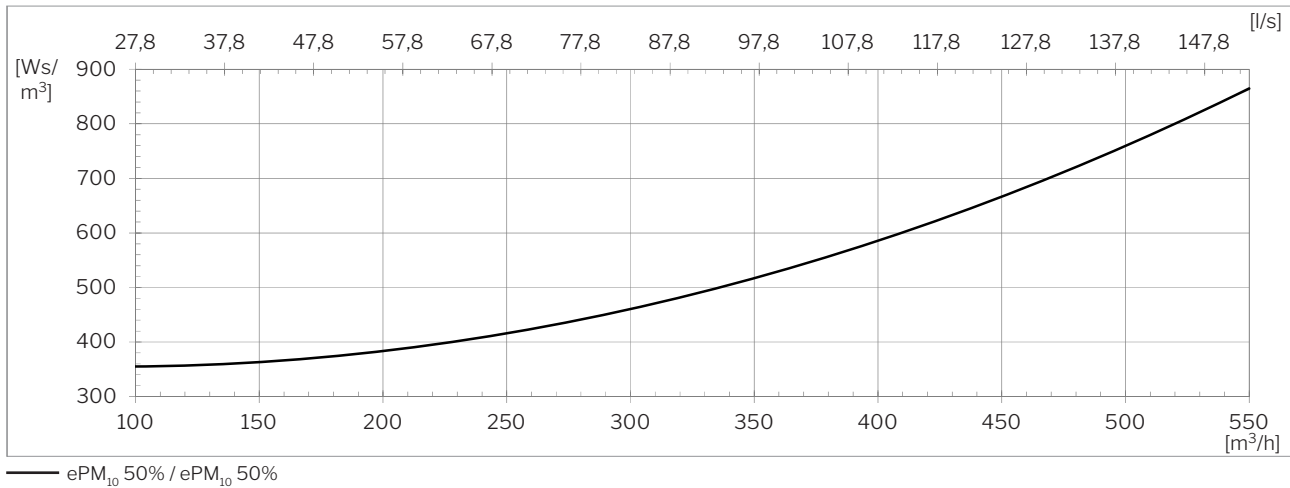



External pressure loss⁷

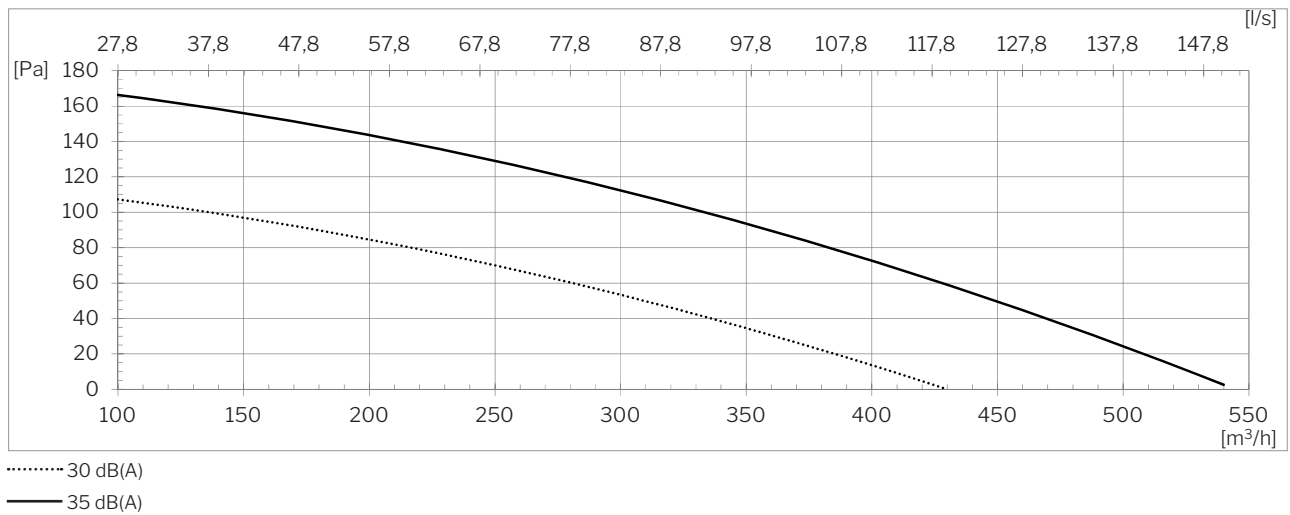

⁷ All measurements were performed in normal operating mode in a standard installation using the facade grills recommended by Airmaster: Airmaster Boomerain® Ø250.

AIRMASTER

Throw (0.2 m/s)

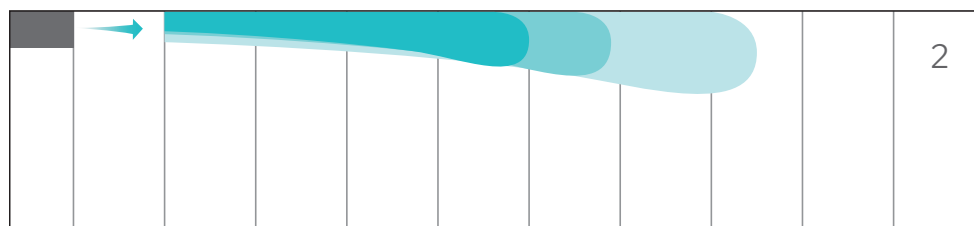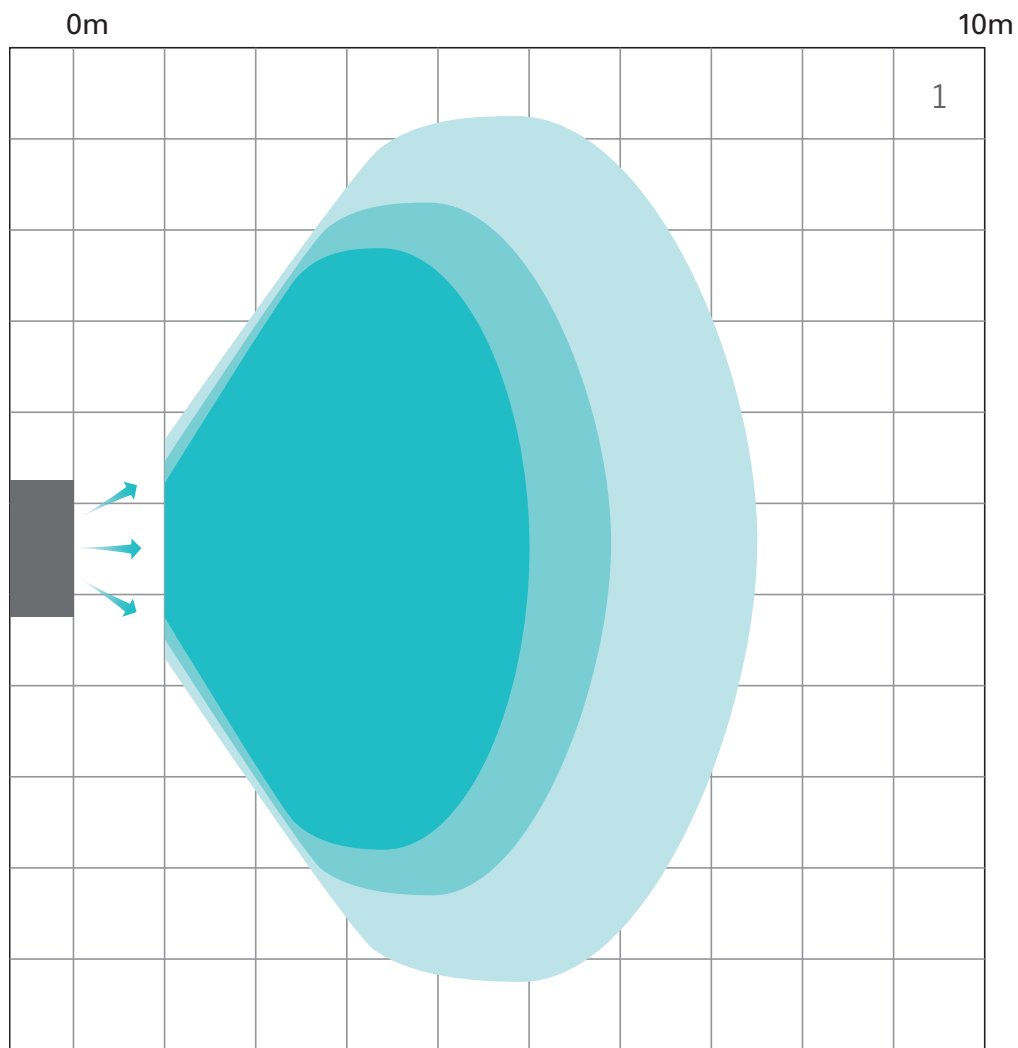

- 350m³/h
- 450m³/h
- 550m³/h



1 Throw, seen from above

2 Throw, seen from the side

Version overview


Exhaust and supply

H: Horizontal
V: Vertical
HRE: Horizontal Rectangular

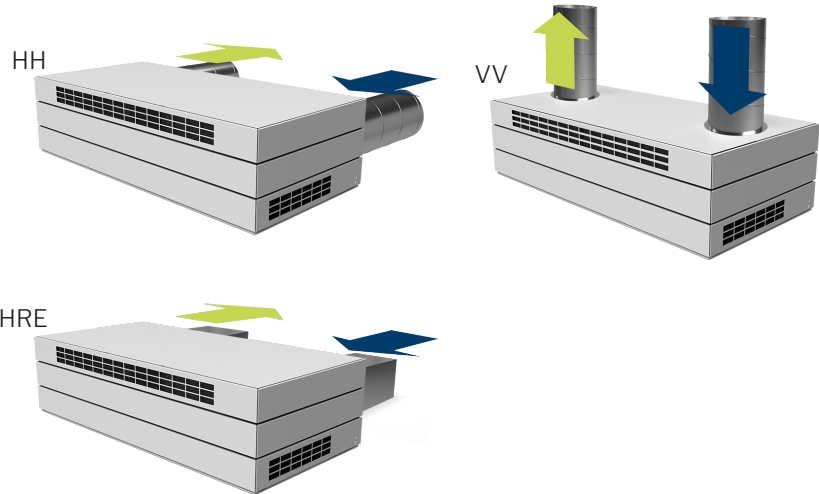

Inlet and extract

T: Top
C: Center
B: Bottom
DI: Ducted Inlet
DE: Ducted Extract

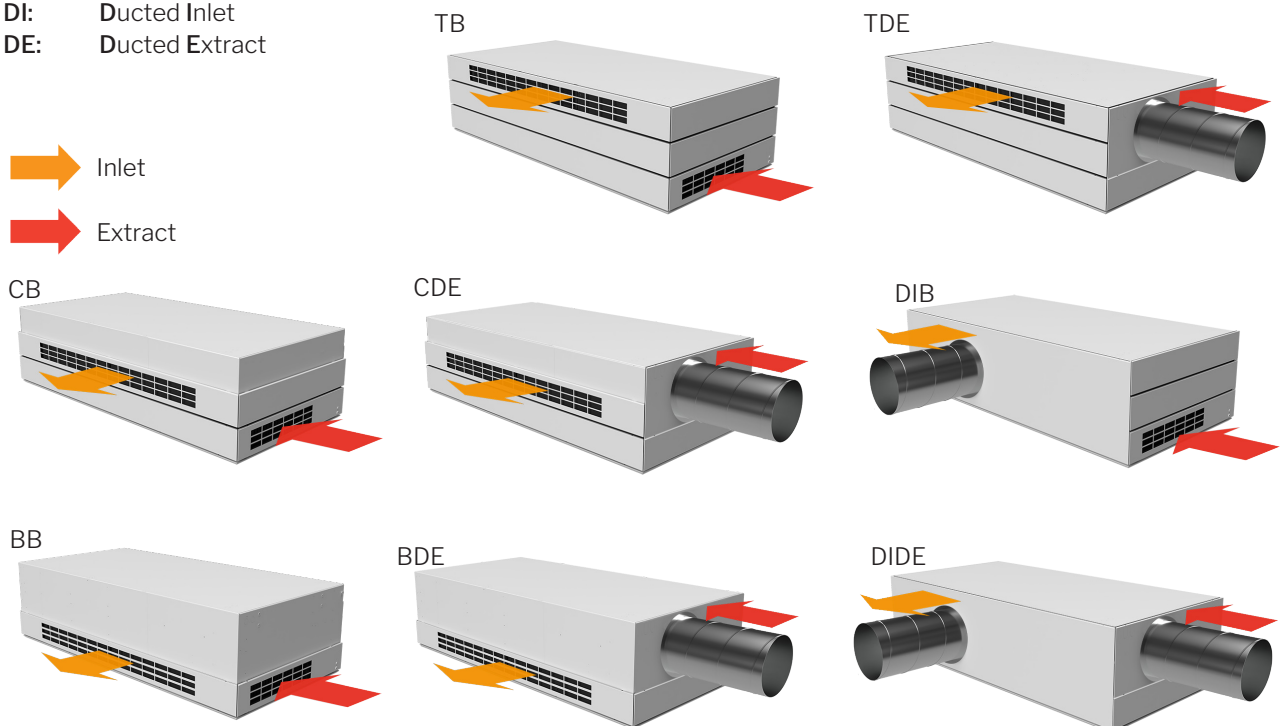


Standard and options

Counterflow heat exchanger (aluminum)	x
Enthalpy counterflow heat exchanger (Polymer membrane)	o
Combination counterflow heat exchanger (Polymer membrane)	o
Motor-driven bypass	x
Motor-driven supply air damper	x
Motor-driven extract air damper	x
Capacitive return for motorized exhaust and supply air dampers	▪
Electric preheating surface	▪
Electric comfort heating surface	▪
Water heating surface	▪
Condensate pump	▪
PIR/motion sensor (wall-mounted)	▪
PIR/motion sensor (built-in)	▪
CO ₂ -sensor (wall-mounted)	▪
CO ₂ -sensor (built-in)	▪
TVOC-sensor (built-in)	▪
CO ₂ -/TVOC-sensor (built-in)	▪
Hygostat (wall-mounted)	o
Service switch	o

Energy meter	▪
Cooling module, CC (Only for horizontal model)	▪
Supply air filter ePM ₁₀ 50%	▪
Supply air filter ePM ₁ 55%	▪
Supply air filter ePM ₁ 80%	○
Extract air filter ePM ₁₀ 50%	x
Wall-/ceiling bracket	▪
Ceiling frame	▪
Airlinq® Viva control panel	▪
Airlinq® Orbit control panel	▪
Airmaster Airlinq® Online	▪
Airlinq® Online API	▪
Airlinq® BMS	▪
LON® module	○
KNX® module	○
MODBUS® RTU RS485 module	▪
BACnet™ MS/TP module	▪
BACnet™ /IP module	▪
Mini B USB (on front of unit)	○

X: Standard ■: Optional o: Special item (not stock item)

Schematic sketch

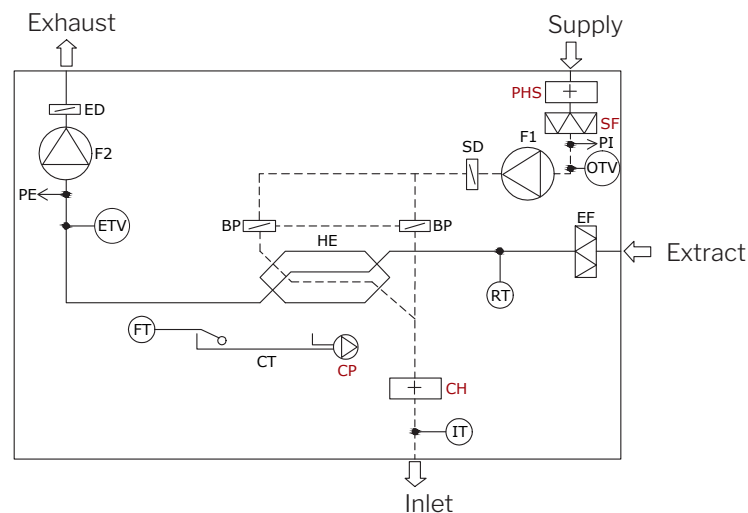

COMPONENT DESIGNATION

BP	Bypass damper (motor-driven)
CH	Electric comfort heating surface (option)
CP	Condensate pump (option)
CT	Condensate tray
ED	Exhaust air damper (motor-driven)

EF	Extract air filter
ETV	Exhaust temperature sensor
FT	Float
F1	Supply air fan
F2	Extract air fan
HE	Counterflow heat exchanger
IT	Inlet-air temperature sensor

OTV	Supply air temperature sensor
PE	Flow meter, extracted air
PHS	Preheating surface (option)
PI	Flow meter, supply air
RT	Room temperature sensor
SD	Supply air damper (Motor-driven)
SF	Supply air filter (option)