

Airlinq® Nova panel



For more information, please scan the QR code:





More Info

Included in box:

- 1 pcs. panel
- 1 pcs. installation cable


Panel dimensions in mm:

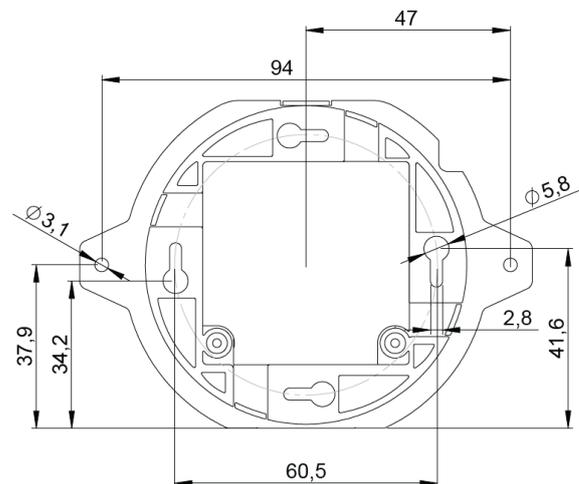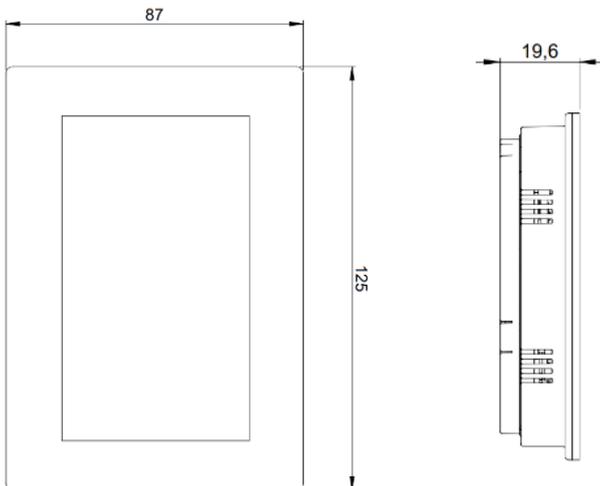

You can mount the panel directly on the wall using the panel mounting frame or in a flush-mounted back box. Either option is possible. The flush-mounted back box must be Euro 1-Gang size.

You need to disassemble the Airlinq® Nova panel before mounting it.

You do so by inserting a screwdriver into the small slot on the side of the panel and carefully pressing the lock holding the frame in place.

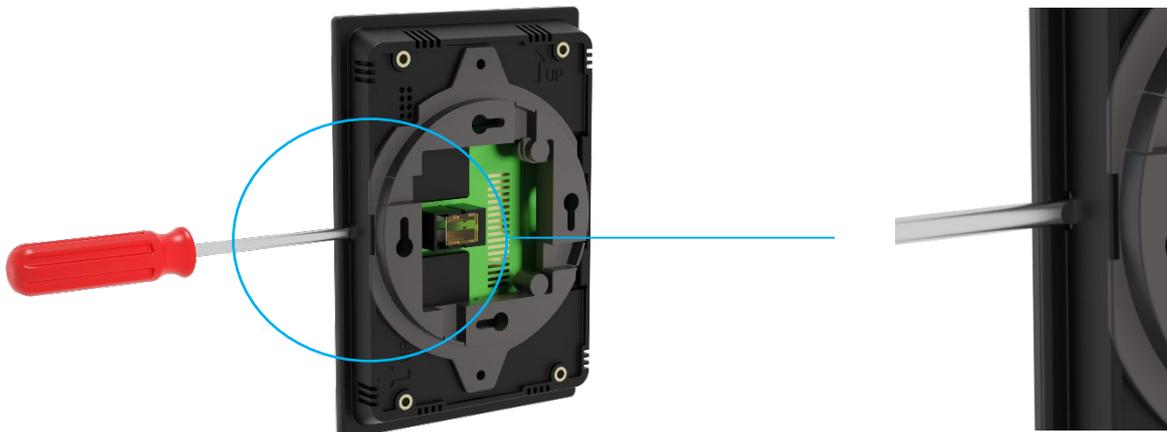


1a Wall mount using the panel mounting frame:

Insert the installation cable into the cable duct from either the side or the top.

Mount the frame using two screws: one at the top and one at the bottom.

Make sure the installation cable is within the cable duct before tightening the screws.

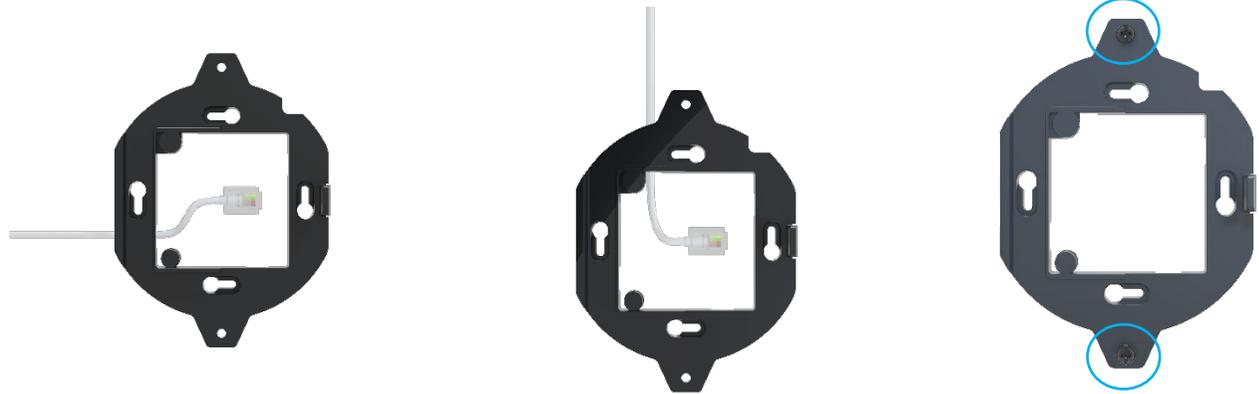

1b Mounting on a flush-mounted back box:

Mount the frame onto the back box, and tighten the screws.

You can use the keyholes and twist the frame into position before tightening the screws.



2 Connect the installation cable to the back of the panel.

Attach the panel to the bracket on the mounting frame and press it into place.

Make sure the installation cable is not twisted or bent behind the panel.



3 Please refer to the AMX 4 installation manual for instructions on connecting the installation cable to the External Connection Module on the AMX 4 unit.